


APC Back-UPS 1200/1500

High performance battery backup and protection for office computers

The Back-UPS 1200 and 1500 provide you with abundant battery backup power, allowing you to work through medium and extended length power outages. They also safeguard your equipment from damaging surges and spikes that travel along utility and phone lines. The Back-UPS 1200 and 1500 also feature “boost” automatic voltage regulation (AVR), which instantly adjusts low voltages to safe levels, so you can work indefinitely during undervoltage situations. Additional standard features make these the perfect units to protect your productivity from the constant threat of power problems and lost data.

Product Features:

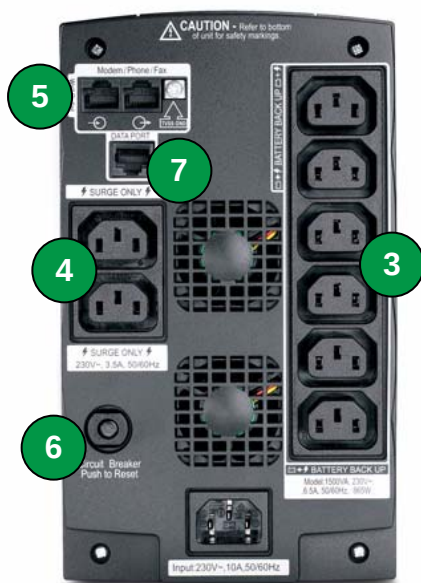

- 1 LCD (Liquid Crystal Display)** provides easy to read information about battery and utility conditions.
- 2 “Boost” Automatic Voltage Regulation (AVR)** corrects undervoltages without draining the battery, saving battery power for when you need it most – outages.
- 3 6 “Battery Backup & Surge Protection” Outlets** keep CPU, monitor and other critical devices running when the power goes out.
- 4 2 “Surge Only” Outlets** protect printers, fax machines or other equipment without reducing battery capacity.
- 5 Data Line Surge Protection** guards against power surges and spikes traveling on phone lines.
- 6 PowerChute Software** lets you use your computer to access additional power protection and management features:
 - Preserves your work, shuts down system during outages
 - Restarts your system, minimizing work disruptions
 - Enables customization of your Back-UPS settings
 - Monitors and displays power and battery status
- 7 Push Button Circuit Breaker** enables quick recovery from overloads.
- 8 3 yr Warranty** for European Union countries - 2 years elsewhere, Equipment Protection Policy where applicable (200,000 AUD, 150,000 Euros, 75,000 GBP), free technical phone and online support.
- 9 Automatic Diagnostic Testing** ensures your unit is ready when you need it.



Back-UPS 1200 & 1500 LCD Specifications

Model Number	BR1200LCDI	BR1500LCDI
Output		
Output Capacity	1200 VA / 720 Watts	1500 VA / 865 Watts
Output Voltage / Freq. (On utility)	230V, 50 or 60Hz	230V, 50 or 60Hz
Output Voltage / Freq. (On battery)	230V, 50 or 60Hz	230V, 50 or 60Hz
Output Connections	8 total IEC 320 C13 outlets: 6 battery backup & surge 2 surge protection only	8 total IEC 320 C13 outlets: 6 battery backup & surge 2 surge protection only
Waveform Type	Stepped Approximation to Sine Wave	Stepped Approximation to Sine Wave
Input		
Input Voltage / Frequency	230V, 50 or 60 Hz	230V, 50 or 60 Hz
Input Connection	Two detachable 6 ft cords (IEC 320 C13 to IEC 320 C14)	Two detachable 6 ft cords (IEC 320 C13 to IEC 320 C14)
Surge Protection		
AC Power Surge Protection	All outlets	All outlets
Data Line Surge Protection	Analog phone line, RJ-11 (single, 2-wire). For phone, fax, modem, DSL	Analog phone line, RJ-11 (single, 2-wire). For phone, fax, modem, DSL
Physical		
Unit Dimensions (H x W x D)	8.75" x 5.25" x 14.0"	8.75" x 5.25" x 14.0"
Unit Weight	29.7 lbs	30.7 lbs
Shipping Dimensions (H x W x D)	12.0" x 9.75" x 18.0"	12.0" x 9.75" x 18.0"
Shipping Weight	32.7 lbs	34.2 lbs
Color	Black	Black
UPC Code	731304257264	731304257288
Battery		
Battery Type	Maintenance-free, sealed lead-acid battery, leakproof	Maintenance-free, sealed lead-acid battery, leakproof
Management		
Alarms	Visual (LCD) and audible alarms	Visual (LCD) and audible alarms
Auto-Shutdown Software	PowerChute Personal Edition (with USB and serial interface)	PowerChute Personal Edition (with USB and serial interface)
Safety		
Certification/Approvals	BSI 1363, C-Tick, CE, GOST, NEMKO, TUV	BSI 1363, C-Tick, CE, GOST, NEMKO, TUV

APC *by* Schneider Electric
 132 Fairgrounds Rd
 West Kingston, RI 02892
 USA
www.apc.com

